

EH5500 系列 (1KVA-3KVA)


EH5500 UPS DSP




产品特性

- DSP
- PFC 1
- LCD+LED 110V UPS
- 40-70Hz
- 1.0 95% UPS
- UPS UPS
- RS232 USB UPS SNMP UPS


面板 & 后盖说明

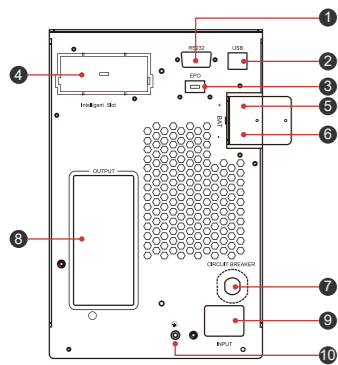

[H1K]

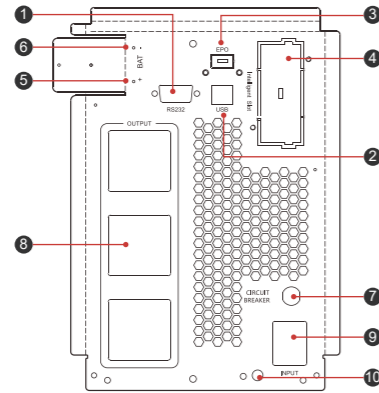

[H2K]

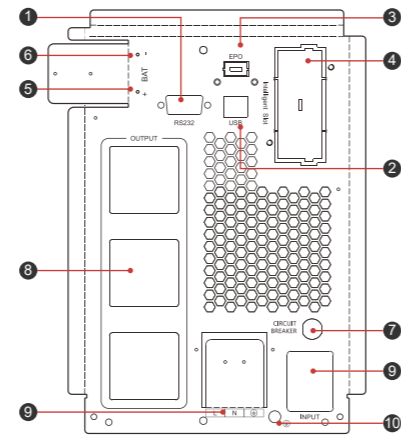

[H3K]

- 1. RS232 6.
- 2. USB 7.
- 3. EPO 8.
- 4. 9.
- 5. 10.

技术规格

型号	H1K	H1KS	H2K	H2KS	H3K	H3KS
容量	1KVA/1KW		2KVA/2KW		3KVA/3KW	
输入	L+N+PE					
	208/220/230/240VAC					
	110-300VAC					
	50/60± 6Hz ± 10Hz					
	0.99					
	4%					
输出	L+N+PE					
	208/220/230/240VAC					
	± 1%					
	50/60Hz± 0.1%					
	2%		4%		PF=0.7	
	1					
转换时间	30min@ 102%~110% Load		1min@ 102%~110% Load			
	10min@ 110%~130% Load		10s@ 110%~130% Load			
	30s@ 130%~150% Load		3s@ 130%~150% Load			
200ms@ >150% Load		200ms@ >150% Load				
整机效率	94.5% @ 220VAC		95.5% @ 220VAC		95.5% @ 220VAC	
	88.5% @ 36VDC		91.5% @ 72VDC		91.5% @ 96VDC	
电池	87.5% @ 24VDC		89.5% @ 48VDC		91.5% @ 72VDC	
	7Ah*2/7Ah*3		7Ah*4/7Ah*6		7Ah*6/7Ah*8	
显示	1K-3K:1A		1-2A		/	
	1KS-3KS:5A		1-12A		/	
接口	LCD		2x 8PIN/Pitch2.54mm		128 4 +4 LED	
	RS-232		Windows 2000/2003/XP/Vista/2008/7/Linux/Unix MAC			
	USB		Windows Family & MAC			
	EPO		SNMP/AS400 Relay Card/RS485			
环境	0-40					
	20%~95%					
	-15~60 (0~40)					
物理特性	1000m 1000m 4000m IEC62040		45db			
	D*W*H mm		385*143*222		395*143*222	
kg		7.5/10.5 3.5		14/16 5.5		
		22/26		5.7		