

EH5500 系列 (1KVA-10KVA)

EH5500 UPS DSP

2U




产品特性

- DSP
- PFC 1
- 40 70Hz
- LCD+LED UPS
- UPS
- 95.5% UPS
- UPS
- UPS UPS
- RS232 USB UPS SNMP UPS


面板 & 后盖说明



- 1.
2. LED
- 3.

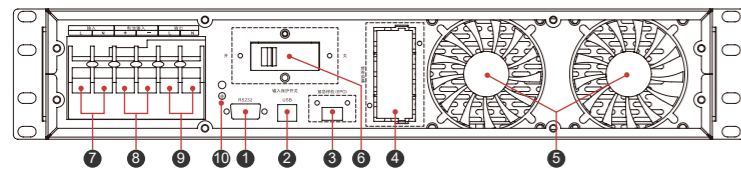

1. RS232
2. USB
3. EPO
- 4.
- 5.
- 6.
- 7.
- 8.
- 9.
- 10.
- 11.
- 12.

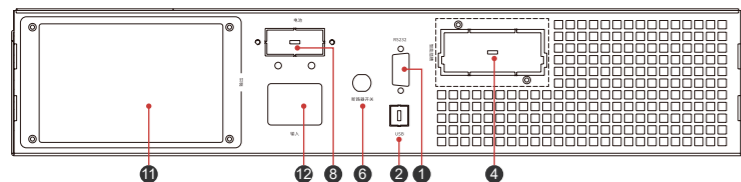

技术规格

型号	H1KR	H1KRS	H2KR	H2KRS	H3KR	H3KRS	H6KRS	H10KRS	
容量	1KVA/1KW		2KVA/2KW		3KVA/3KW		6KVA/6KW	10KVA/10KW	
输入	L+N+PE								
	208/220/230/240VAC								
	110-300VAC								
	50/60± 6Hz ± 10Hz)								
	0.99								
	4%								
输出	L+N+PE								
	208/220/230/240VAC								
	± 1%								
	50/60Hz± 0.1%								
	2%		4%		PF=0.7				
	1								
转换时间	30min@ 102%~110% Load 1min@ 102%~110% Load								
	10min@ 110%~130% Load				10s@ 110%~130% Load				
	30s@ 130%~150% Load				3s@ 130%~150% Load				
200ms@ >150% Load 200ms@ >150% Load									
整机效率	94.5% @ 220VAC		95.5% @ 220VAC		95.5% @ 220VAC		95.5%	95%	
	87.5% @24VDC	88.5% @36VDC	89.5% @48VDC	91.5% @72VDC	91.5% @72VDC	91.5% @96VDC	最高效率 95.3%，满载效率 94.8% (20 节电池)		
电池	7Ah*2/3	/	7Ah*4	/	7Ah*6	/	/		
	1KR-3KR: 1A		1-2A		1-12A			1-12A	
	1KRS-3KRS: 5A		1-12A					1A	
显示	LCD		2x 8PIN/Pitch2.54mm		128	4	+4	LED / / /	
	RS-232	Windwos 2000/2003/XP/Vista/2008/7/Linux/Unix MAC							
接口	USB Windows & MAC								
	SNMP/AS400 Relay Card/RS485								
环境温度	0-40								
	20%~95%								
	-15~60				0-40				
	1000m		1000m		4000m		IEC62040		
物理特性	D*W*H mm		438*420*88		438*600*88	438*420*88	438*600*88	438*420*88	
	kg		9.5/11.5	6	17	6.5	21.5	7	10